

GOLF NEW S3L FO SR

KU142EV

CE EN ISO 20345:2022 S3L FO SR ESD

39-47

LOW SAFETY SHOE

KUBE Supergrip

High safety shoe, WPA anti-scratch back leather thickness 1,8-2,0 mm.

Highly perspiring and abrasion resistant fabric lining.

Reinforced heel area STABILITY SUPPORT in PU.

Soft, lined and padded tongue.

COMPLETELY METAL FREE SHOE

TOECAP 200J polymeric composite **non-thermic** according to EN 22568

PL MIDSOLE flexible antiperforation composite fabric according to EN 22568

SOLE KUBE bidensity polyurethane antistatic, resistant to hydrolysis ISO 5423:92,

to hydrocarbons and to abrasion, anti-shock and anti-slipping

INSOLE 5000 three-materials extracomfort: perspiring, removable, anatomic, absorbing, ESD and anti-bacterial

The shoe satisfies the requirement according to the norm IEC 61340-4-3:2017 (IEC 61340-5-1:2016) for the electrical resistance ESD


FO sole resistance to hydrocarbons

SR slip resistance

Size 39-47 Shoe weight Sz 42 gr. 500

↪ AREAS OF APPLICATION

	Farming and Agriculture		Hydrocarbons and Chemicals
	Logistics and Light Industry		Automotive Components
	Metal and Wood Carpentry		ESD Area

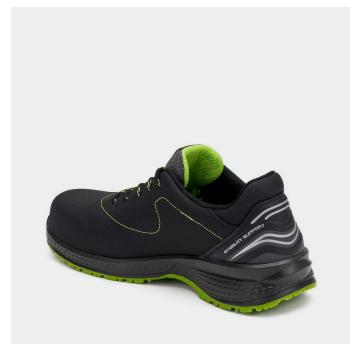

↪ CERTIFICATIONS APPLIED



Water Penetration and Absorption (WPA)



Antistatic Footwear



Water-Repellent Upper



PL Puncture Resistance with Non-Metallic Insert (nail Ø 4.5mm)



Heel Energy Absorption



Slip Resistance (mandatory ceramic-Nails test)



Hydrocarbon Resistance

↪ TECHNOLOGIES AND MATERIALS



No metal



Mondo Point 11



Slip Resistance (optional glycerin test)



ESD - Electrostatic Discharge



Extreme Lightness



Heel Stability Support



Metal-Free



Scratch-Resistant Leather

↪ ANTI-SLIP RESULTS

*after simulation of walking by slight abrasion

Ceramic tile floor with NaLS	Forward heel (heel slip 7°) ≥ 0.31 ≥ 0.56	Backward heel (heel slip 7°) ≥ 0.36 ≥ 0.45	Ceramic tile floor with glycerin	Forward heel (heel slip 7°) ≥ 0.19 ≥ 0.35	Backward heel (heel slip 7°) ≥ 0.22 ≥ 0.35
SRA Ceramic + Nails	Flat ≥ 0.32 ≥ 0.39	Heel ≥ 0.28 ≥ 0.37	SRB Steel + Glicerol	Flat ≥ 0.18 ≥ 0.30	Heel ≥ 0.13 ≥ 0.20



Scratch-Resistant Leather

Zero Abrasion technology uses leather finished with multiple layers of polyurethane to protect the upper from scratches, cuts, and wear. This solution ensures that the footwear maintains flawless performance and appearance even after months of intense use, providing advanced resistance against abrasive surfaces and mechanical environments—all while preserving foot comfort and breathability.



Heel Stability Support

The Stability Support device is engineered to maximize heel support when walking. Unlike standard systems, it focuses support on specific areas, reducing foot stress and enhancing weight distribution. This leads to more natural movements, benefiting the back and joints, notably for those standing for long hours, and also reduces internal wear of the safety footwear.

KUBE Supergrip

Kube is a safety shoe with a young and sporty style, featuring a special highly slip resistant compound and specific inverted-profile cube-shaped lugs on the tread. Combined, these elements provide exceptional resistance on the slippiest surfaces. This work shoe is therefore ideal for indoor environments. The sole is designed with reduced volume and height, ensuring both a lightweight feel and a look suitable for everyday wear. Thanks to its outstanding slip resistance, Kube has earned numerous field awards and passed rigorous tests—including the one for roof work (formerly UNI 11583:2015), one of the most challenging slip tests.

