

BIKE S1P

KU141T

CE UNI EN ISO 20345:2012 S1P SRC ESD CLASS 3

Low holed shoe, suede back leather thickness 1,8-2,0 mm.
Heel with WRU anti-scratch back leather thickness 1,8-2,0 mm.
Highly perspiring and abrasion resistant fabric lining.
Shoe with refracting fabric insert.
Soft, lined and padded tongue.

COMPLETELY METAL FREE SHOE

TOECAP 200J polymeric **composite non-thermic** according to EN 12568

MIDSOLE flexible antiperforation composite fabric according to EN 12568

SOLE KUBE bidensity polyurethane antistatic, resistant to hydrolysis ISO 5423:92, to hydrocarbons and to abrasion, anti-shock and anti-slipping **SRC**

INSOLE 5000 three-materials extracomfort: perspiring, removable, anatomic, absorbing, ESD and anti-bacterial.

The shoe satisfies the requirement according to the norm IEC 61340-4-3:2001 for the electrical resistance **ESD class 3** (electric dissipative footwear)

Size 35-47 Shoe weight Sz 42 gr. 540




MATERIALS



TECHNOLOGIES



SECTORS

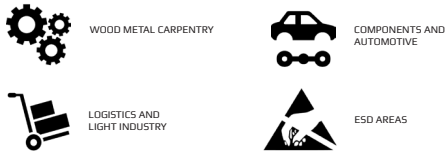

SOLE



In order to avoid the high number of accidents caused by slipping danger, Giasco realized an **excellent anti-slipping product**.

This sole is called **Kube**, a young and sporty styled shoe equipped with a special gripping compound and specific cubic dowels with inverted profile in the

outsole.

With thanks to these special characteristics Kube obtained the maximum certification against slipping: **jobs on inclined roofs** (UNI 11583:2015).

ANTISLIPPING TEST RESULTS



SRA ceramic + NaLS	HEEL >= 0,28 FLAT >= 0,32	0,46 0,43
SRB steel + glycerol	HEEL >= 0,13 FLAT >= 0,18	0,30 0,29

PLUS



ZERO ABRASION

The Zero Abrasion technology is an anti-scratch leather, finished with a polyurethane multi-layer, that assures a complete protection of the upper against usury and abrasion. Highly resistant to water and oils, this leather is suitable for people who like wearing always clean and nice shoes even after months of usage.