

PERU S1PL FO SR

KU095T

CE UNI EN ISO 20345:2012 S1P SRC ESD

34-47

SAFETY SANDAL

KUBE Supergrip

Safety Sandal, suede leather thickness 1,8-2,0 mm.
Highly perspiring and abrasion resistant fabric lining.
Closing with strap.

COMPLETELY METAL FREE SHOE

TOECAP 200J polymeric composite **non-thermic** according to EN 22568
PL MIDSOLE flexible **antiperforation composite fabric** according to EN 22568
SOLE KUBE bidensity polyurethane antistatic, resistant to hydrolysis ISO 5423:92,

to hydrocarbons and to abrasion, anti-shock and anti-slipping **SRC**
INSOLE 5000 three-materials extracomfort: perspiring, removable, anatomic, absorbing, ESD and anti-bacterial
The shoe satisfies the requirement according to the norm IEC 61340-4-3:2017 (IEC 61340-5-1:2016) for the electrical resistance **ESD**.
FO sole resistance to hydrocarbons
SR sole resistance against slipping

Size 34-47 Shoe weight Sz 42 gr. 550


→ AREAS OF APPLICATION

 Logistics and Light Industry

 Automotive Components

 Metal and Wood Carpentry

 ESD Area

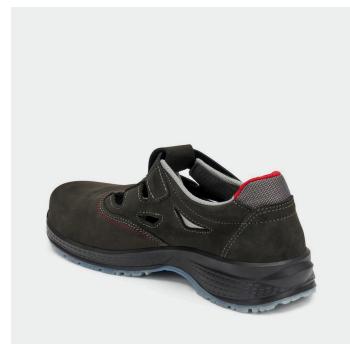

→ CERTIFICATIONS APPLIED



PL Puncture Resistance with Non-Metallic Insert (nail Ø 4.5mm)



Slip Resistant Sole



DGUV 112-191



Slip Resistance (mandatory ceramic-Nals test)



Heel Energy Absorption



Antistatic Footwear



Hydrocarbon Resistance

→ TECHNOLOGIES AND MATERIALS



No metal



ESD - Electrostatic Discharge



Metal-Free



High Breathability



Mondo Point 11



Extreme Lightness



Slip Resistance (optional glycerin test)

→ ANTI-SLIP RESULTS

*after simulation of walking by slight abrasion

Ceramic tile floor with Nals	Forward heel (heel slip 7°)	Backward heel (heel slip 7°)	Ceramic tile floor with glycerin	Forward heel (heel slip 7°)	Backward heel (heel slip 7°)
	≥ 0.31 ≥ 0.56	≥ 0.36 ≥ 0.45		≥ 0.19 ≥ 0.35	≥ 0.22 ≥ 0.35
SRA Ceramic + Nails	Flat ≥ 0.32 ≥ 0.39	Heel ≥ 0.28 ≥ 0.37	SRB Steel + Glicerol	Flat ≥ 0.18 ≥ 0.30	Heel ≥ 0.13 ≥ 0.20

↪ SOLE

KUBE Supergrip

Kube is a safety shoe with a young and sporty style, featuring a special highly slip resistant compound and specific inverted-profile cube-shaped lugs on the tread. Combined, these elements provide exceptional resistance on the slippiest surfaces. This work shoe is therefore ideal for indoor environments. The sole is designed with reduced volume and height, ensuring both a lightweight feel and a look suitable for everyday wear. Thanks to its outstanding slip resistance, Kube has earned numerous field awards and passed rigorous tests—including the one for roof work (formerly UNI 11583:2015), one of the most challenging slip tests.

